


Automatic Bag-Packaging

Packaging Machine for Kikaku bags



PACKAGING

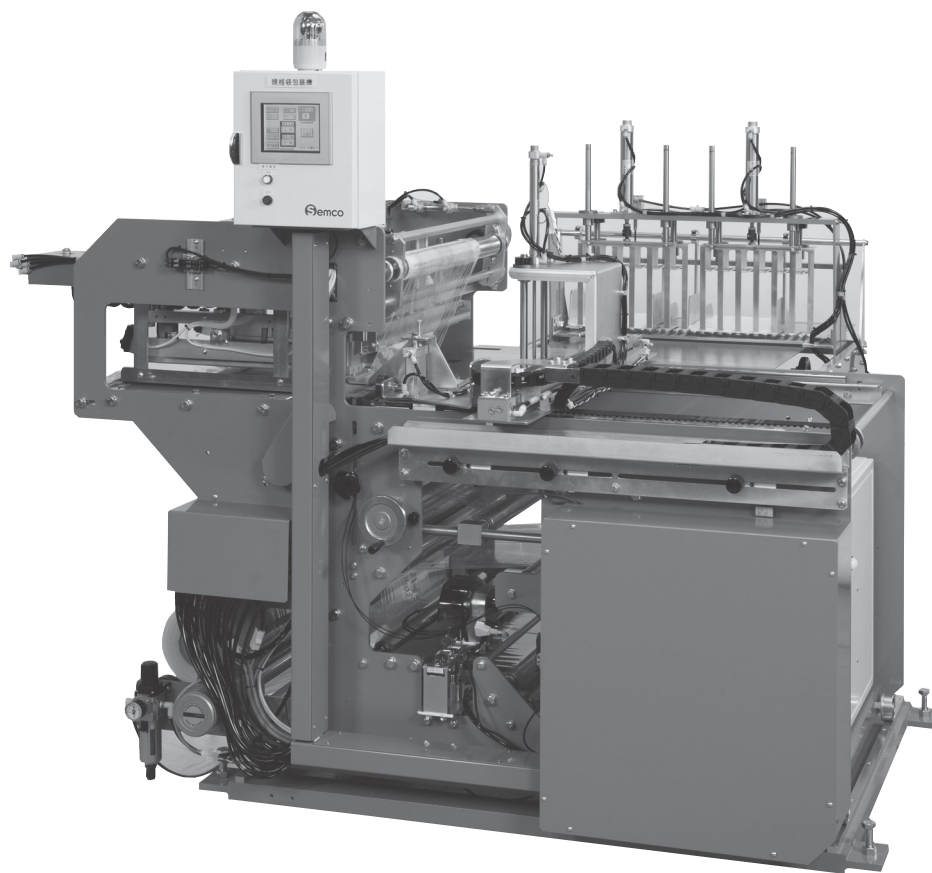

Bag Packaging Automation

Packaging Machine for Kikaku bags (Standard bags)



The world's only packaging machine manufacturer with over 30 years of experience


Semco Co Ltd offers a packaging machine that automatically outer-packs bagged products for standard bag, side seal bag, fashion bag or laminated bag. The packing machine can connect to bag making machine from any manufacturers. (Some adjustment of the bag making machine is required.) Semco Co Ltd can offer total facility from dosing material to film forming, processing and packaging.

Packaging Machine for Kikaku bags (Standard bags)

100-pack of polyethylene bags are packaged with placing information sticker.

Specifications

Exterior film	Material	LD, LLD sheet
	Thickness	25-35 μ m
	Width	Length + 70mm
Roll diameter	Max Φ 300mm (3 inch paper tube roll)	
Packing Capacity	Max 4 packaging/min	
Power Supply	AC200/220V/3-phases/50-60Hz 20A	
Consumption air	Approx. 55 L/min (Max)	
Pressured air	\geq 0.5 MPa (Dehumidifying air)	

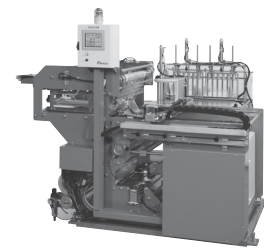

Packaging Machine for Kikaku bags
KH type

Product Size Table

Model	KH-208S (6)	KH-208 (6)			KH-208M (6)		KH-208L (6)	
Machine's width [mm] (blade width)	650	850 (650)			850 (650)		1200 (850)	
Product's line	3 lines	2 lines		3 lines	1 line	2 lines	2 lines	3 lines
Product's length [mm] (line direction)	190~270	300~395	395~480	300~340	530~600	480~500	500~600	~480
Product's width	100~180	200~270	270~340	200~230	380~460	340~360	360~460	~500
Bag code	No.5→No.10	No.11→No.13	No.14→No.16	No.11→No.12	No.18→No.20	No.16→No.17	No.17→No.20	~No.16

Packaging Machine for plastic bags

Specifications

Exterior film	Material	LD, LLD sheet
	Thickness	25-35 μ m
	Width	Length + 100mm
Roll diameter	Max Φ 300mm (3 inch paper tube roll)	
Packing Capacity	Max 3 packaging/min	
Power Supply	AC200/220V/3-phases/50-60Hz 20A	
Consumption air	40 L/min (Max)	
Pressured air	\geq 0.5 MPa (Dehumidifying air)	



Packaging Machine for plastic bags

■ The color of the products are not exactly same as the color in this catalog.

■ This specification and standards may be changed without prior notice.

BC11-1-00045-00
2012.6.7

Semco

セムコ株式会社
SEMCO CO.,LTD.

Head Office TEL 082-928-6150 〒731-5151 広島市佐伯区五日市町上河内1609-3
Tokyo Office TEL 048-257-3750 〒332-0023 埼玉県川口市飯塚4-6-18
Osaka Office TEL 072-965-3905 〒578-0911 大阪府東大阪市中新開1丁目6番12号
Nagoya Office TEL 052-760-6181 〒465-0028 名古屋市名東区猪高台1丁目1321番地(ウインF1階)

<http://www.semco.jp/>